



## 特點:

- 定電流式電源輸出
- 短路/開路電路保護設計
- 各組獨立電流偵測
- 轉換效率可達99%(Max)



## 適用產品:

- ✓ LED路燈
- ✓ LED太陽能路燈,庭園燈,氣氛燈
- ✓ 高效率LED戶外看板,LED投影機燈源
- ✓ LED廣告燈箱,背光板燈具
- ✓ 其他高效率LED燈具

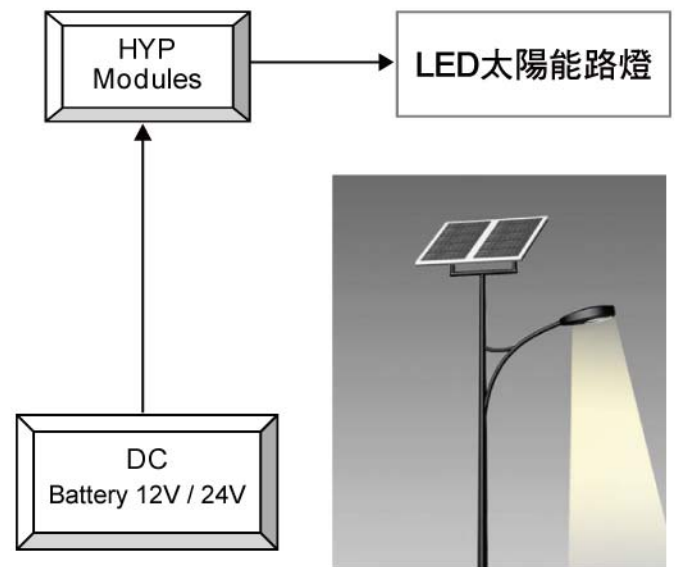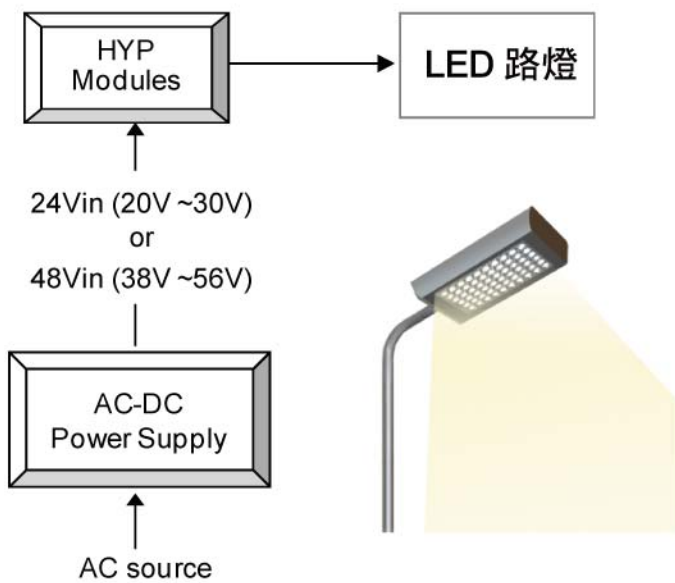

Desc.	HYP190x series	HYP1901	HYP2105
Input Voltage	24V or 48V	24V	10.5V~18V
Input Current (Max)	2A	4A	3A
Efficiency (Max)	96%	99%	94%
Output Voltage (Typical)	22V~44V	22V	13.2V~32V
Output Current (Typical)	350mA~700mA	4.2A	900mA~1400mA
Output Power (Max)	30W~100W	100W	30W(Max)
Operating Temperature Range	-20 <sup>0</sup> C~ +85 <sup>0</sup> C	-20 <sup>0</sup> C~ +85 <sup>0</sup> C	-20 <sup>0</sup> C~ +85 <sup>0</sup> C
Droupt Voltage (Vin-Vout) (Mini mun)	0.2V	0.2V	—
Other Fuction	—	—	Voltage Reverse Protection



**HAWYANG SEMICONDUCTOR CORP. 浩陽半導體股份有限公司**

Taiwan 6F., No. 96, Minchuan Rd., Xindian, Taipei County, Taiwan Tel: 886-2-2219-0903 Fax: 886-2-2219-3189

Shenzhen Room 12B-9, Zheng Quan Building, No.5020, Bin He Avenue, Fu Tian District, Shen Zhen City Tel: (0755)89807897 Fax: (0755)82990700

E-mail: power4led@hawyang-semi.com www.hawyang-semi.com / www.power4led.com