


最佳選擇

效率高, 成本低  
格栅燈電源方案

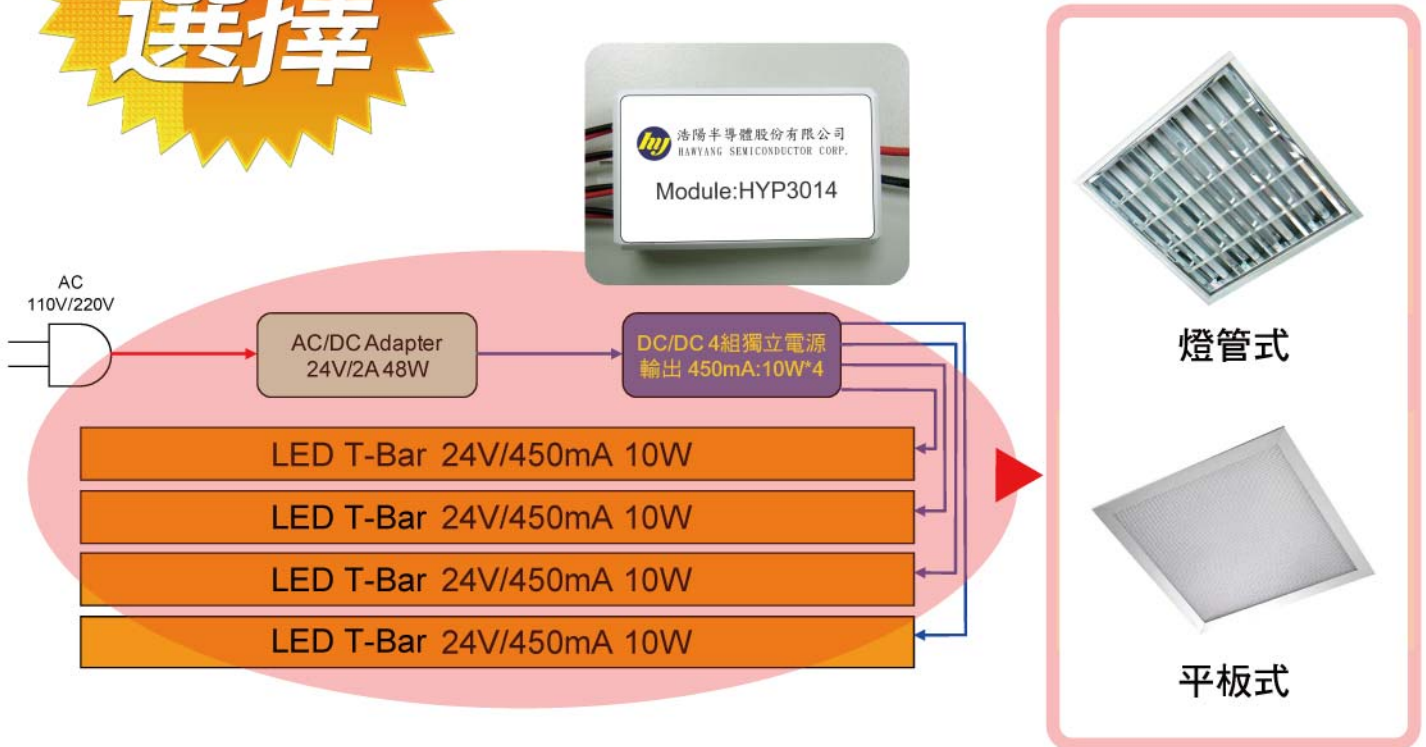

- ✓ 總電源轉換效率可達90%
- ✓ 適用各廠牌AC/DC 變壓器(24Vout)
- ✓ 定電流式輸出
- ✓ 電源: 短路/開路保護設計
- ✓ 每支燈管電源獨立, 可接1.2.3.4支的組合

HYP3014 Desc.	450mA	900mA
<b>Input Voltage (V)</b>	24V	24V
<b>Input Current (mA)</b>	2.1A (Typ)	4.2A (Typ)
<b>Efficiency (Max)</b>	96% (Typ)	96% (Typ)
<b>Output Voltage (V)</b>	22V	22V
<b>Output Current (mA)</b>	450mA	900mA
<b>Output Power (W)</b>	40W (Total)	80W (Total)
<b>Operating Temperature Range</b>	-20°C~ +85°C	-20°C~ +85°C



**HAWYANG SEMICONDUCTOR CORP. 浩陽半導體股份有限公司**

Taiwan 6F., No. 96, Minchuan Rd., Xindian, Taipei County, Taiwan Tel: 886-2-2219-0903 Fax: 886-2-2219-3189

Shenzhen Room 12B-9, Zheng Quan Building, No.5020, Bin He Avenue, Fu Tian District, Shen Zhen City Tel: (0755)89807897 Fax: (0755)82990700

E-mail: power4led@hawyang-semi.com www.hawyang-semi.com / www.power4led.com